

# RNZQ-B701A


12MP Fisheye Camera



## KEY FEATURES

- 12MP 360° Panoramic View
- Multi-codec (H.265, H.264, HJPEG) Streaming
- Intelligent Video Analysis
- Up to 4000 x 3072@20fps
- 3 Power (AC 14V, DC 12V, PoE) Support
- Audio / Alarm Support
- IP66 Support

## DIMENSION (Unit : mm)

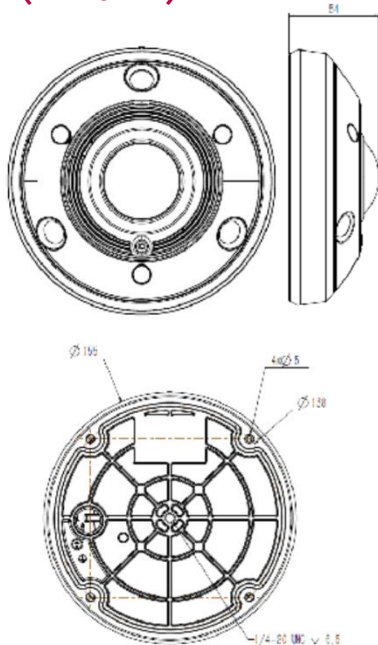

## SPECIFICATIONS

Features		RNZQ-B701A	
<b>Camera</b>	Image Sensor	12MP CMOS	
	Lens	2mm (Fixed), F2.8, H : 180° / V : 180° / D : 180°	
	Min. Illumination	Color 0.04 lux @ F2.8 (AGC ON) B/W 0 lux @ IR LED on	
	Day / Night	Dual ICR	
	IR LEDs	3	
	IR Distance	15 m	
	Image Setting	Configurable Brightness, Saturation, Contrast, HLC, Smart Defog	
	<b>Video/ Audio</b>	Video Compression	H.265, H.264 HP/MP/BP, M-JPEG
		Resolution	60Hz 20fps@4000x3072, 30fps@(3072x3072, 2560x2560) 50Hz 20fps@4000x3072, 25fps@(3072x3072, 2560x2560)
Max. Frame Rate		30fps@(3072x3072, 2560x2560)	
View mode		360°, 180°, PTZ, 10 display modes	
Multi-Streaming		2	
ROI (Region of Interest)		4 zones	
Privacy Mask		Yes (Up to 4)	
Motion Detection		Yes	
Video Analytics		Tripwire/Perimeter	
Text Overlay		Yes	
Audio Compression		G.711A/G.711U/ADPCM-D/AAC_LC	
Two-way Audio		Yes	
Audio Detection		Yes	
<b>Event</b>	Event Trigger	Motion Detection/IP Conflict/Port Alarm	
	Event Notification	Email, Alarm output	
	Pre -Alarm Recoding	Yes	
<b>Interface</b>	Analog Video Out	Yes	
	Audio In / Out	1 In / 1 out	
	Alarm In / Out	2 In / 1 out	
	Storage	Micro SD (Up to 128 GB)	
<b>Network</b>	Ethernet	RJ-45 10/100BASE-T/1000BASE-T	
	Security	Password protection, IP filter	
	Open Protocol	ONVIF (Profile S)	
	Protocol	IPv4/IPv6, HTTP, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, TCP, UDP, DHCP, PPPoE	
	Web Viewer	IE8, IE10, IE11	
	Video Management Software	NO	
	Max. Connections	4 Level/8 Users	
	<b>General</b>	Power Source	AC24V, DC12V, POE
Max. Power Consumption		11W	
Max. Input Current		820mA (AC24V), 911mA (DC 12V), 252mA (PoE)	
Operating Temperature / Humidity		-30°C ~ 60°C / 0% ~ 95%RH	
Standard Approvals		KC, LVD, CE, FCC(Processing)	
Language		Korean, Chinese, Japanese, English, Turkish, Spanish	
Color / Material		Black / Diecasting	
Ingress Protection		IP66	
Dimension (Ø x H)		155 mm X 54 mm	
Weight		0.77kg ( Camera only )	